


Document Scanner KV-S1037X




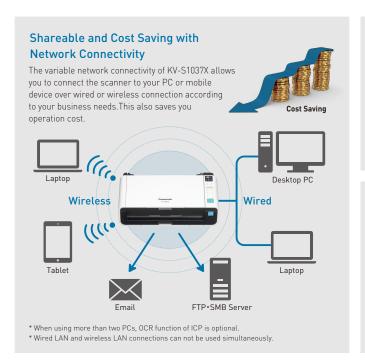

Space Saving with Compact Design

The compact body of KV-S1037X can fit in small and narrow spaces but it is packed with essential features to finish scanning jobs fast and efficient.





* Clearance required to set the feed tray and exit tray

Versatile Scanning with Various Scanning Options

Scanning various documents is made easy with KV-S1037X. No more problem when scanning a long paper, passport, bankbook, or even embossed cards at once.







* Use the carrier sheet (KV-SS077) to scan passport and the mixed batch card guide to scan embossed cards

Specifications

Scanning Face		Duplex
Scanning Method		1 line color CIS (300 dpi/600 dpi), Background: Black
Scanning Resolution*1		100 dpi - 600 dpi (1 dpi step) and 1,200 dpi (interpolated)
		Optical: 300 dpi/600 dpi (Automatic switch)
Scanning Speed*2		
A4/Letter, Binary/Color		Simplex: 30 ppm, Duplex: 60 ipm
(200 dpi, 300 dpi)		
Double-Feed Detection		Ultrasonic (The length of documents that can be detected is
		70 mm (2.8 in.) or more.)
Image Compression		MH, MMR, JPEG, JPEG2000
Binary Mode Halftone		Dither, Error Diffusion
ADF Document	Size	Manual feeding: 48 mm x 54 mm - 216 mm x unlimited
		(1.9 in. × 2.1 in 8.5 in. × unlimited)*3
		Automatic feeding: 48 mm × 54 mm - 216 mm × 356 mm
		(1.9 in. × 2.1 in 8.5 in. × 14 in.)
	Thickness	Paper: 0.04 mm – 0.5 mm (1.6 mils – 19.7 mils)
		Passport*4: 3.0 mm (118.1 mils) (including carrier sheet)
		ISO format card: 0.76 mm (0.03 in.) Embossed card up to 1.24 mm (0.049 in.)
		Note: 1 mil = 0.001 in.
	Weight	20 g/m² – 413 g/m² (5 lb. – 110 lb.)
Feed Tray Capacity		50 sheets (80 g/m² [21 lb.] High-quality woodfree paper)*5
Supported Operating System		Windows Vista® SP2 (32 bit/64 bit)
		Windows® 7 (32 bit/64 bit), Windows 8 (32 bit/64 bit)
		Windows 8.1 (32 bit/64 bit), Windows 10 (32 bit/64 bit)
		Windows Server® 2003 SP2 (32 bit/64 bit)
		Windows Server® 2003 R2 SP2 (32 bit/64 bit)
		Windows Server® 2008 SP2 (32 bit/64 bit)
		Windows Server® 2008 R2 SP1 (64 bit)
		Windows Server® 2012 (64 bit), Windows Server® 2016 (64 bit)
		Mac OS 10.8 or later, Linux® Red Hat® Enterprise Desktop 6/7.Ubuntu® 12/14/15/16/17

- *1 When scanning a document larger than A5 size at resolutions over 600 dpi, the scanning may fail due to insufficient memory.
- The scanning speed is the maximum speed of the scanner hardware. It does not include software processing time, data transfer time, etc. The scanning speed measurement is based on Panasonic's measuring method.
 Using Long paper mode the images will be split into sizes determined by the Paper Size setting.
 Use the carrier sheet (KV-SS077) to scan passport. Depending on the condition
- (operating environment, dirt, scratches, etc.) of the carrier sheet or passport, the image processing function may not work properly. Scan beforehand to confirm the scanned image.
- Depending on the paper type or operating environment (temperature, humidity, etc.), the unit may not feed the documents properly.
- When paper weight is more than 209 g/m² (55 lb.): 5 sheets (A4, High-quality woodfree paper).
 When installed the mixed batch card guide: 20 sheets (80 g/m² [21 lb.], High-quality woodfree paper).
- Values differ depending on the country.
- The power requirement differs depending on the country/area
- If connected to a network device (hub, router, etc.) that supports IEEE802.3az.

 Presto! PageManager and Presto! BizCard are either registered trademarks or trademarks of NewSoft Technology Corporation in the United States and / or other countries.
 *10 The edition of Presto! PageManager 9 included with this unit is different to the commercially available one.
- *11 USB Scanning only.

Interface		USB 3.1 Gen1 (backward compatible)
		LAN (10Base-T/100Base-TX/1000Base-T), Wireless LAN (IEEE802.11n/g/b)
Recommended Web Browser		Internet Explorer 11, Mozilla Firefox (latest version),
		Google Chrome (latest version)
Wireless LAN	Communication standard	IEEE802.11n/g/b
	Frequency range*6	KV-S1037X U X ML : 2.412 GHz – 2.472 GHz (1 – 13ch)
	(center frequency) / Channel	KV-S1037X M : 2.412 GHz - 2.462 GHz (1 - 13ch)
External Dimensions (W X D X H)		303 mm × 177 mm × 137 mm (12.0 in. × 7.0 in. × 5.4 in.)
Weight		2.7 kg (5.9 lb.)
Power Requirement*7		AC 100 - 240 V, 50/60 Hz
Power Consumption	Maximum (Scanning)	26 W or less (DC 16 V 1.5 A)
·	Minimum (Ready)	6 W or less
	Sleep	2.0 W or less (USB connection), 2.0 W or less (Wired LAN connection)*8,
		2.0 W or less (Wireless LAN connection)
	Power Off	0.3 W or less
Operating Environment		Temperature: 5 °C - 35 °C (41 °F - 95 °F), Humidity: 20 % - 80 % RH
Storage Environment		Temperature: -10 °C - 50 °C (14 °F - 122 °F), Humidity: 8 % - 75 % RH
Accessories		DVD-ROM: Device driver, ISIS driver software, TWAIN driver software,
		User utility, Scan Button Setting Tool, Image Capture Plus, Operating Manual,
		Control sheet, Presto! PageManager 9*9*10, Presto! BizCard 6*9
		Quick Installation Guide, Power cord, AC adaptor, 1.5 m USB cable (USB 3.1),
		Mixed batch card guide, Shading paper, Guidance sticker, Correction sticker
Operating Environment Storage Environment		Options Flatbed Scanner: KV-SS081*11, Roller exchange kit: KV-SS058,
		Roller cleaning paper: KV-SS03, Carrier sheet: KV-SS077
		0.3 W or less Temperature: 5 °C – 35 °C (41 °F – 95 °F), Humidity: 20 % – 80 % Temperature: -10 °C – 50 °C (14 °F – 122 °F), Humidity: 8 % – 75 % DVD-ROM: Device driver, ISIS driver software, TWAIN driver software, User utility, Scan Button Setting Tool, Image Capture Plus, Operating Mai Control sheet, Prestol PageManager 9***10, Prestol BizCard 6** Quick Installation Guide, Power cord, AC adaptor, 1.5 m USB cable (USB: Mixed batch card guide, Shading paper, Guidance sticker, Correction sticl Options Flatbed Scanner: KV-SS081**11, Roller exchange kit: KV-SS

Trademarks and registered trademarks

- ENERGY STAR and the ENERGY STAR mark are registered U.S. marks.
 ISIS is a registered trademark or trademark of EMC Corporation in the United States and other countries.
- Windows, Windows Vista, Windows Server and Internet Explorer are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
- Mac OS is a trademark of Apple Inc., registered in the U.S. and other countries. Mozilla and Firefox are registered trademarks of the Mozilla Foundation.
- Google and Google Chrome are registered trademarks of Google LLC. Wi-Fi, Wi-Fi Direct and the Wi-Fi CERTIFIED logo are registered trademarks or trademarks of Wi-Fi Alliance.
- All other brand or product names are the property of their respective holder

This product is designed to reduce hazardous chemical substances in accordance with the RoHS directive.

• All photographs in this brochure are simulated.

As an ENERGY STAR® partner

guidelines for energy efficiency

Panasonic has determined that this product meets the ENERGY STAR

- · Weights and dimensions are approximate.
- Specifications are subject to change without notice. . These products may be subject to export control regulations.









DISTRIBUTED BY:

