

You want **easy**.

You want **fast**.

You want **great images**.



Get everything you want from
a small desktop scanner—and more.


- Easy setup and integration
- Up to 25 pages—or 50 images—per minute
- Renowned image quality from Kodak
- Robust suite of bundled software
- USB 2.0 interface (card and cable included)
- Fits in any work space



QuickScan Pro

FEATURES/BENEFITS

Perfect Page with iThresholding: Advanced image processing from Kodak that allows you to scan even poor-quality documents at full speed and get exceptional images. Boosts productivity by virtually eliminating the need to rescan or change settings.



Automatic image cropping and straightening for outstanding image accuracy at full scanning speed.

Fast scanning: Capture up to 100 ipm in simultaneous output mode.

Feature-rich bundled software makes it easy to maximize productivity right out of the box.

KODAK Capture Software, Lite, installs in minutes and offers a range of scanning features for practically any workgroup application. Easily upgradeable to the full version of Capture Software.

READIRIS Pro 8 Corporate Edition provides key functions for locating textual information fast, including multi-page optical character recognition (OCR) and direct scanning to searchable PDF files.

KOFAX CAPIO for KODAK Scanners is an easy-to-use personal filing and retrieval system.

CAPTIVA QUICKSCAN PRO offers image capture functionality and customization features.

For integrators, bundled ISIS and Kodak-developed TWAIN drivers deliver speedy system integration. For end-users, the exclusive, Kodak-developed TWAIN drivers enable Kodak's advanced image processing at the scanner's full rated speed.

Brightness and contrast control: Customize color output to fit your application.


VRS compatible for more imaging options.

Flexible Electronic Color Dropout: Suppress non-critical red, green or blue background to improve forms processing.

Reliable multi-feed detection for better scanning productivity.

Quiet operation and small footprint: The i30 and i40 models fit easily on any desktop.

KODAK Service & Support: Our team of service experts is here for you around-the-clock, and around the world.

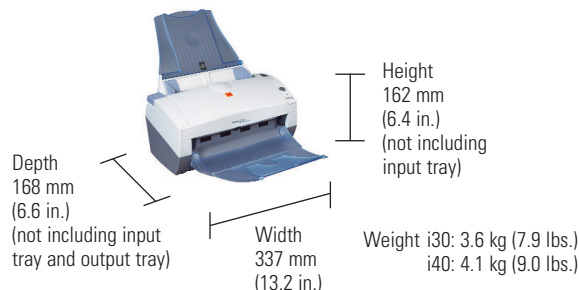

As an ENERGY STAR® Partner, Eastman Kodak Company has determined that these products meet ENERGY STAR® guidelines for energy efficiency.

specifications

Throughput Speeds: (at 200 dpi, portrait, letter-size)	Bitonal, Grayscale: Up to 25 ppm/50 ipm Color: Up to 25 ppm/40 ipm
Scanning Technology	Single CCD (i30); Dual CCD (i40) Grayscale output bit depth is 8 bits Color capture bit depth is 48 bits (16 x 3) Color output bit depth is 24 bits (8 x 3)
Recommended Daily Volume	Up to 1,000 pages per day
Optical Resolution	600 dpi
Illumination	Fluorescent (cold cathode)
Output Resolutions	75, 100, 150, 200, 240, 300, 400, and 600 dpi
Maximum Document Size	215 mm x 355.6 mm (8.5 in. x 14 in.)
Minimum Document Size	Single-sheet feeding: 50 mm x 87.5 mm (2.0 in. x 3.5 in.) Multiple-sheet feeding: 87.5 mm x 125 mm (3.5 in. x 5.0 in.)
Paper Thickness and Weight	14 - 28 lb. paper
Feeder	Up to 50 sheets of 20 lb. paper
Multi-Feed Detection	Length detection
Connectivity	USB 2.0 (card and cable included)
Interface Support	TWAIN and ISIS drivers (included)
Imaging Features (in the scanner)	Perfect Page Scanning with iThresholding, Adaptive Threshold Processing, deskew, autocrop, relative cropping, aggressive cropping, color dropout, simultaneous output of bitonal and color or bitonal and grayscale images, color processing tables
On-board Compression	CCITT Group IV; JPEG or uncompressed output
File Format Outputs	BMP, TIFF and JPEG (searchable PDF with bundled software)
Warranty (US and Canada)	One-year warranty
Electrical Requirements	100-240 V (International), 50/60 Hz
Power Consumption	i30 Standby: <12 Watts; i30 Running: <30 Watts i40 Standby: <12 Watts; i40 Running: <40 Watts
Environmental Factors	ENERGY STAR qualified scanners Operating temperature: 10°C to 35°C (50°F to 95°F) Operating humidity: 10% to 85%
Acoustical Noise	Standby: <46 dB Operating: <58 dB
PC Configuration	Minimum: PENTIUM III, 1 GHz processor, 128 MB RAM, USB 1.1. Recommended: PENTIUM IV, 2.5 GHz processor, 512 MB RAM, USB 2.0
Supported Operating Systems	WINDOWS XP (supports USB 2.0) WINDOWS 2000 Professional (supports USB 2.0) WINDOWS Me (USB 1.1 support only) WINDOWS 98 SE (USB 1.1 support only)
Bundled Software	KODAK Capture Software, Lite READIRIS Pro 8 Corporate Edition KOFAX CAPIO for KODAK Scanners CAPTIVA QUICKSCAN PRO
Approvals and Product Certifications	AS/NZS 3548 Class B (C-Tick Mark), CAN/CSA-C22.2 No. 60950 (C-UL Mark), Canada ICES - 003 Issue 3 (Class B), GB4943, GB9254 (Class B), GB 17625.1 Harmonics, (CCC "S&E" Mark), EN 55022 ITE Emissions (Class B), EN 61000-3-2, Powerline Harmonics, EN 61000-3-3 Flicker, EN 55024 ITE Immunity, (CE Mark), EN 60950 (TUV GS Mark), IEC 60950, CISPR 22 Class B, VCCI (Class B), CNS 13438 (Class B), (BSMI Mark), UL 60950 (UL Mark), CFR 47 Part 15 Subpart B (FCC Class B)

Specifications subject to change without notice.

CONTACT INFORMATION

Eastman Kodak Company, Commercial Imaging, Rochester, NY 14650 1-800-944-6171
 Kodak Canada, Inc Toronto, Ontario M6M 1V3 1-800-465-6325
 Kodak GmbH Hedelfingerstr 60, 70327 Stuttgart, Germany EAMER-DI-Capture@kodak.com
 Kodak (Australasia) Pty. Ltd. North Ryde NSW 2113 Australia 61-2-9870-4224
 Kodak (Hong Kong) Limited North Point, Hong Kong 07021 852-2654-9330
 Kodak Japan Limited, Tokyo, Japan 81-3-5540-2270 jp-di-mktg@kodak.com
 Kodak de Mexico Mariano Otero 408 Guadalajara, Mexico (52) (33) 3818-6598
 For other areas outside the U.S.A., call +1-585-722-9287

kodak.com/go/CIgService

kodak.com/go/docimaging

